



OUTLINER 50

Interior Linear 

- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- Multiple mounting options (fixed, surface or pendant).
- Long & Short bracket accessory for wall installation.
- Family member of OUTLINER Series, with variety of luminous area widths (20,30,40,50)
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

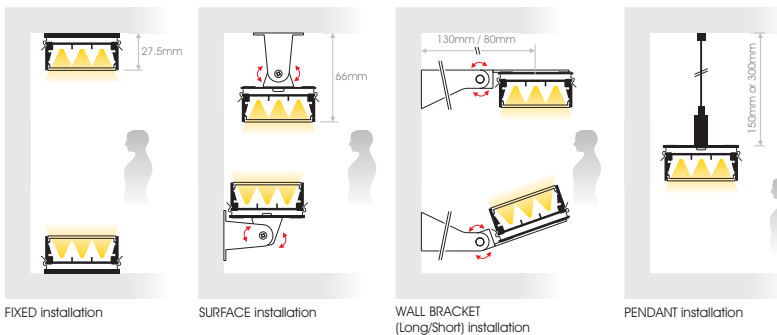

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



Input cable with IP connectors (as extra)



Input & Output cables with IP connector (as extra)



Model	Luminaire Colour*	Colour Temperature	CRI	Watt* / Length	Type	Voltage
OUTLINER 50 FIXED (OUTLINER50-F)						
OUTLINER 50 SURFACE (OUTLINER50-S)						
OUTLINER 50 SHORT BRACKET 8cm (OUTLINER50-B1)	(AN) Anodized (WH) White (BL) Black	(20) 2000K (25) 2500K (27) 2700K (30) 3000K (40) 4000K (57) 5700K	(80) > 80	(32W053) 31.5W / 53cm (53W086) 52.5W / 86.3cm (63W103) 63W / 103cm (74W120) 73.5W / 119.7cm (95W153) 94.5W / 153cm (126W203) 126W / 203cm	(TR) Transparent (MS) Milky Satin (MP) Microprismatic	(24) 24VDC
OUTLINER 50 LONG BRACKET 13cm (OUTLINER50-B2)						
OUTLINER 50 PENDANT (OUTLINER50 P1) H:150cm (OUTLINER50 P2) H:300cm						

* Available in other colours or/and power upon request

Ordering Code Example: OUTLINER50-F-AN-4080-53W086-MS-24

RGBWW / RGBCW / RGB

Model	Luminaire Colour*	Colour	Watt / Length	Type	Voltage
OUTLINER 50 FIXED (OUTLINER50-F)		(RGBWW) RGBWW (RGBCW) RGBCW 84LED/m	(41W053) 40.5W / 53cm (69W089) 69.3W / 88.7cm (81W103) 81W / 103cm (98W124) 98.4W / 124.4cm (122W153) 121.5W / 153cm (162W203) 162W / 203cm		
OUTLINER 50 SURFACE (OUTLINER50-S)		(RGBWW) RGBWW (RGBCW) RGBCW 60LED/m**	(29W053) 29.1W / 53cm (47W083) 46.8W / 83cm (59W103) 58.5W / 103cm (70W123) 70.2W / 123cm (88W153) 87.6W / 153cm (117W203) 117W / 203cm		
OUTLINER 50 SHORT BRACKET 8cm (OUTLINER50-B1)	(AN) Anodized (WH) White (BL) Black	(RGB96) RGB 96LED/m	(35W053) 34.5W / 53cm (60W091) 60.3W / 90.5cm (69W103) 69W / 103cm (82W122) 81.9W / 121.7cm (104W153) 103.5W / 153cm (138W203) 138W / 203cm	(TR) Transparent (MS) Milky Satin (MP) Microprismatic	(24) 24VDC
OUTLINER 50 LONG BRACKET 13cm (OUTLINER50-B2)		(RGB60) RGB 60LED/m**	(22W053) 21.6W / 53cm (35W083) 34.8W / 83cm (44W103) 43.5W / 103cm (52W123) 52.2W / 123cm (65W153) 65.1W / 153cm (87W203) 87W / 203cm		
OUTLINER 50 PENDANT (OUTLINER50 P1) H:150cm (OUTLINER50 P2) H:300cm		(RGB30) RGB 30LED/m**	(11W053) 10.8W / 53cm (17W083) 17.1W / 83cm (22W103) 21.6W / 103cm (26W123) 25.8W / 123cm (32W153) 32.4W / 153cm (43W203) 43.2W / 203cm		(12) 12VDC

* Available in other colours upon request
** The LED density of these ribbons is low thus, the homogeneity of lighting surface of Milky type luminaire will be affected.

Ordering Code Example: OUTLINER50-F-AN-RGB60-52W123-MP-24



OUTLINER 40

Interior Linear 


- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- Multiple mounting options (fixed, surface or pendant).
- Long & Short bracket accessory for wall installation.
- Long & Short bracket accessory for wall installation.
- Family member of OUTLINER Series, with variety of luminous area widths (20,30,40,50)
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:


On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth




FIXED installation



SURFACE installation

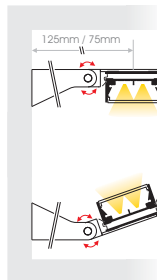

WALL BRACKET
(Long/Short) installation

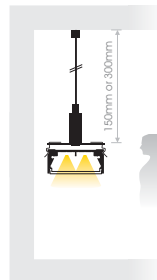

PENDANT installation

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



Input cable
with IP connectors
(as extra)



Input & Output cables
with IP connector
(as extra)



Model	Luminaire Colour*	Colour Temperature	CRI	Watt* / Length	Type	Voltage
OUTLINER 40 FIXED (OUTLINER40-F)						
OUTLINER 40 SURFACE (OUTLINER40-S)						
OUTLINER 40 SHORT BRACKET 7.5cm (OUTLINER40-B1)	(AN) Anodized (WH) White (BL) Black	(20) 2000K (25) 2500K (27) 2700K (30) 3000K (40) 4000K (57) 5700K	(80) >80	(21W053) 21W / 53cm (35W086) 35W / 86.3cm (42W103) 42W / 103cm (49W120) 49W / 119.7cm (63W153) 63W / 153cm (84W203) 84W / 203cm	(TR) Transparent (MS) Milky Satin (MP) Microprismatic	(24) 24VDC
OUTLINER 40 LONG BRACKET 12.5cm (OUTLINER40-B2)						
OUTLINER 40 PENDANT (OUTLINER40 P1) H:150cm (OUTLINER40 P2) H:300cm						

* Available in other colours or/and power upon request

Ordering Code Example: OUTLINER40-F-AN-4080-35W086-MS-24

RGBWW / RGBCW / RGB

Model	Luminaire Colour*	Colour	Watt / Length	Type	Voltage
OUTLINER 40 FIXED (OUTLINER40-F)		(RGBWW) RGBWW (RGBCW) RGBCW 84LED/m	(27W053) 27W / 53cm (46W089) 46.2W / 88.7cm (54W103) 54W / 103cm (66W124) 65.6W / 124.4cm (81W153) 81W / 153cm (108W203) 108W / 203cm		
OUTLINER 40 SURFACE (OUTLINER40-S)		(RGBWW) RGBWW (RGBCW) RGBCW 60LED/m**	(19W053) 19.4W / 53cm (31W083) 31.2W / 83cm (39W103) 39W / 103cm (47W123) 46.8W / 123cm (58W153) 58.4W / 153cm (78W203) 78W / 203cm		
OUTLINER 40 SHORT BRACKET 7.5cm (OUTLINER40-B1)	(AN) Anodized (WH) White (BL) Black	(RGB96) RGB 96LED/m	(23W053) 23W / 53cm (40W091) 40.2W / 90.5cm (46W103) 46W / 103cm (55W122) 54.6W / 121.7cm (69W153) 69W / 153cm (92W203) 92W / 203cm	(TR) Transparent (MS) Milky Satin (MP) Microprismatic	(24) 24VDC
OUTLINER 40 LONG BRACKET 12.5cm (OUTLINER40-B2)		(RGB60) RGB 60LED/m**	(14W053) 14.4W / 53cm (23W083) 23.2W / 83cm (29W103) 29W / 103cm (35W123) 34.8W / 123cm (43W153) 43.4W / 153cm (58W203) 58W / 203cm		
OUTLINER 40 PENDANT (OUTLINER40 P1) H:150cm (OUTLINER40 P2) H:300cm		(RGB30) RGB 30LED/m**	(07W053) 7.2W / 53cm (11W083) 11.4W / 83cm (14W103) 14.4W / 103cm (17W123) 17.2W / 123cm (22W153) 21.6W / 153cm (29W203) 28.8W / 203cm		(12) 12VDC

* Available in other colours upon request

** The LED density of these ribbons is low thus, the homogeneity of lighting surface of Milky type luminaire will be affected.

Ordering Code Example: OUTLINER40-F-AN-RGB60-35W123-MP-24




OUTLINER 30

Interior Linear 


- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- Multiple mounting options (fixed, surface or pendant).
- Long & Short bracket accessory for wall installation.
- Long & Short bracket accessory for wall installation.
- Family member of OUTLINER Series, with variety of luminous area widths (20,30,40,50)
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:


On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

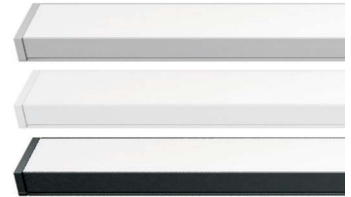


FIXED installation

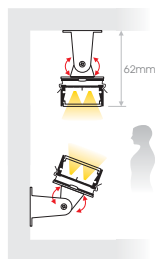

SURFACE installation



WALL BRACKET
(Long/Short) installation

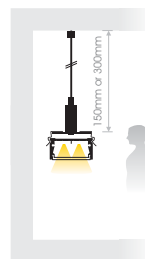

PENDANT installation

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



Input cable
with IP connectors
(as extra)



Input & Output cables
with IP connector
(as extra)



Model	Luminaire Colour*	Colour Temperature	CRI	Watt* / Length	Type	Voltage			
OUTLINER 30 FIXED (OUTLINER30-F)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) > 80	(21W053) 21W / 53cm	(TR) Transparent (MS) Milky Satin (MP) Microprismatic	(24) 24VDC			
OUTLINER 30 SURFACE (OUTLINER30-S)		(25) 2500K		(35W086) 35W / 86.3cm					
OUTLINER 30 SHORT BRACKET 7cm (OUTLINER30-B1)		(27) 2700K		(42W103) 42W / 103cm					
OUTLINER 30 LONG BRACKET 12cm (OUTLINER30-B2)		(30) 3000K		(49W120) 49W / 119.7cm					
		(40) 4000K		(63W153) 63W / 153cm					
		(57) 5700K		(84W203) 84W / 203cm					
OUTLINER 30 PENDANT (OUTLINER30 P1) H:150cm (OUTLINER30 P2) H:300cm									

* Available in other colours or/and power upon request

Ordering Code Example: OUTLINER30-F-AN-4080-35W086-MS-24

RGBWW / RGBCW / RGB

Model	Luminaire Colour*	Colour	Watt / Length	Type	Voltage		
OUTLINER 30 FIXED (OUTLINER30-F)	(AN) Anodized (WH) White (BL) Black	(RGBWW) (RGBCW) RGBWW RGBCW 84LED/m	(27W053) 27W / 53cm (46W089) 46.2W / 88.7cm (54W103) 54W / 103cm (66W124) 65.6W / 124.4cm (81W153) 81W / 153cm (108W203) 108W / 203cm	(TR) Transparent (MS) Milky Satin (MP) Microprismatic	(24) 24VDC		
OUTLINER 30 SURFACE (OUTLINER30-S)		(RGBWW) (RGBCW) RGBWW RGBCW 60LED/m**	(19W053) 19.4W / 53cm (31W083) 31.2W / 83cm (39W103) 39W / 103cm (47W123) 46.8W / 123cm (58W153) 58.4W / 153cm (78W203) 78W / 203cm				
OUTLINER 30 SHORT BRACKET 7cm (OUTLINER30-B1)		(RGB96) RGB 96LED/m	(23W053) 23W / 53cm (40W091) 40.2W / 90.5cm (46W103) 46W / 103cm (55W122) 54.6W / 121.7cm (69W153) 69W / 153cm (92W203) 92W / 203cm				
OUTLINER 30 LONG BRACKET 12cm (OUTLINER30-B2)		(RGB60) RGB 60LED/m**	(14W053) 14.4W / 53cm (23W083) 23.2W / 83cm (29W103) 29W / 103cm (35W123) 34.8W / 123cm (43W153) 43.4W / 153cm (58W203) 58W / 203cm				
OUTLINER 30 PENDANT (OUTLINER30 P1) H:150cm (OUTLINER30 P2) H:300cm		(RGB30) RGB 30LED/m**	(07W053) 7.2W / 53cm (11W083) 11.4W / 83cm (14W103) 14.4W / 103cm (17W123) 17.2W / 123cm (22W153) 21.6W / 153cm (29W203) 28.8W / 203cm				(12) 12VDC

* Available in other colours upon request

** The LED density of these ribbons is low thus, the homogeneity of lighting surface of Milky type luminaire will be affected.

Ordering Code Example: OUTLINER30-F-AN-RGB60-35W123-MP-24



OUTLINER 20

Interior Linear 


- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- Multiple mounting options (fixed, surface or pendant).
- Long & Short bracket accessory for wall installation.
- Family member of OUTLINER Series, with variety of luminous area widths (20,30,40,50)
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:


On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

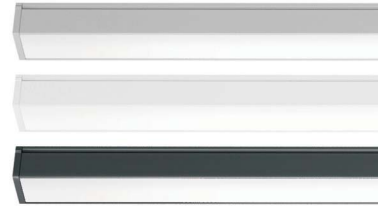


FIXED installation



SURFACE installation

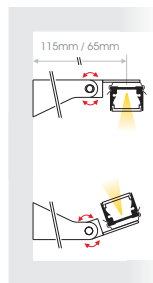

WALL BRACKET
(Long/Short) installation



PENDANT installation

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



ELA.008
Antislipper for
vertical installation
(as extra)



Input cable
with IP connectors
(as extra)



Input & Output cables
with IP connector
(as extra)



Model	Luminaire Colour*	Colour Temperature	CRI	Watt* / Length	Type	Voltage
OUTLINER 20 FIXED (OUTLINER20 F)						
OUTLINER 20 SURFACE (OUTLINER20 S)						
OUTLINER 20 SHORT BRACKET 6.5cm (OUTLINER20 B1)	(AN) Anodized (WH) White (BL) Black	(20) 2000K (25) 2500K (27) 2700K (30) 3000K (40) 4000K (57) 5700K	(80) > 80	(11W053) 10.5W / 53cm (18W086) 17.5W / 86.3cm (21W103) 21W / 103cm (25W120) 24.5W / 119.7cm (32W153) 31.5W / 153cm (42W203) 42W / 203cm	(TR) Transparent (MS) Milky Satin (MP) Microprismatic	(24) 24VDC
OUTLINER 20 LONG BRACKET 11.5cm (OUTLINER20 B2)						
OUTLINER 20 PENDANT (OUTLINER20 P1) H:150cm (OUTLINER20 P2) H:300cm						

* Available in other colours or/and power upon request

Ordering Code Example: OUTLINER20 F-AN-4080-18W086-MS-24

RGBWW / RGBCW / RGB

Model	Luminaire Colour*	Colour	Watt / Length	Type	Voltage
OUTLINER 20 FIXED (OUTLINER20 F)		(RGBWW) RGBWW (RGBCW) RGBCW 84LED/m	(14W053) 13.5W / 53cm (23W089) 23.1W / 88.7cm (27W103) 27W / 103cm (33W124) 32.8W / 124.4cm (41W153) 40.5W / 153cm (54W203) 54W / 203cm		
OUTLINER 20 SURFACE (OUTLINER20 S)		(RGBWW) RGBWW (RGBCW) RGBCW 60LED/m**	(10W053) 9.7W / 53cm (16W083) 15.6W / 83cm (20W103) 19.5W / 103cm (23W123) 23.4W / 123cm (29W153) 29.2W / 153cm (39W203) 39W / 203cm		
OUTLINER 20 SHORT BRACKET 6.5cm (OUTLINER20 B1)	(AN) Anodized (WH) White (BL) Black	(RGB96) RGB 96LED/m	(12W053) 11.5W / 53cm (20W091) 20.1W / 90.5cm (23W103) 23W / 103cm (27W122) 27.3W / 121.7cm (35W153) 34.5W / 153cm (46W203) 46W / 203cm	(TR) Transparent (MS) Milky Satin (MP) Microprismatic	(24) 24VDC
OUTLINER 20 LONG BRACKET 11.5cm (OUTLINER20 B2)		(RGB60) RGB 60LED/m**	(07W053) 7.2W / 53cm (12W083) 11.6W / 83cm (15W103) 14.5W / 103cm (17W123) 17.4W / 123cm (22W153) 21.7W / 153cm (29W203) 29W / 203cm		
OUTLINER 20 PENDANT (OUTLINER20 P1) H:150cm (OUTLINER20 P2) H:300cm		(RGB30) RGB 30LED/m**	(04W053) 3.6W / 53cm (06W083) 5.7W / 83cm (07W103) 7.2W / 103cm (09W123) 8.6W / 123cm (11W153) 10.8W / 153cm (14W203) 14.4W / 203cm		(12) 12VDC

* Available in other colours upon request
** The LED density of these ribbons is low thus, the homogeneity of lighting surface of Milky type luminaire will be affected.

Ordering Code Example: OUTLINER20 B2-AN-RGB60-17W123-MP-24