

SOLARIS™

Introducing the
Incredible


FLARIE™ JR!

Full
RDM
Functionality

Available with
((()))
Wireless Option



Little brother of the fabulous
Solaris LED Flare, winner
Live Design 2013 Product
of the Year and PLASA 2013
Sustainability Award

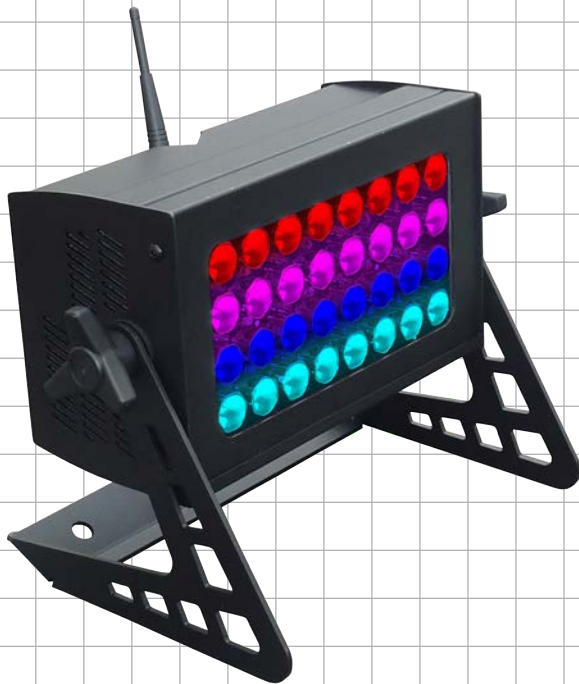

Super Bright LED RGBW Wash/Strobe/Blinder

MORE SAVINGS! Simultaneous colour wash and strobe in ONE fixture – Saves labour, time, space, energy, and cost.

MORE SMOOTH! Instantaneous RGBW colour mixing with 1200Hz refresh rate – Smooth on-camera dimming.

MORE VERSATILE! Pixel-map feature divides into 1, 2, or 4 sections for ultimate control.

MORE SATURATED COLOURS! Intense, deep reds and blues. Ultra-bright greens. Brilliant camera-friendly whites.

MORE FLEXIBLE! 36-degree beam angle optimized for most applications.



Production Supplies & Services Worldwide

tmb-info@tmb.com

LOS ANGELES

LONDON

NEW YORK

BEIJING

TORONTO

Tel: +1 818.899.8818

Tel: +44 (0)20.8574.9700

Tel: +1 201.896.8600

Tel: +86 10.8492.1587

Tel: +1 519.538.0888

© TMB

FLARE JR.

SPECIFICATIONS

Light sources	32 10W CREE® LEDs (divided in to 4 pixels)
Beam Spread	36°
Colours	4- R, G, B, W
Average colour wavelength (manufacturer rated)	red: 625 nm
	green: 530 nm
	blue: 460 nm
	white: >5700K
Refresh rate	1200 Hz
Intensity control	16bit or 8bit
Control	DMX-512
AC Power	100-240VAC Universal Input, 50/60 Hz, ~400 W
Cooling	air-cooled fan
Operating Temperature	-20°C - +40°C
DMX Channels	3-24 depending on control mode
DMX Connectors	In/Out - XLR 5-pin F/M
Max. power draw	~400 W
Power Connectors	In- PowerCON 20A blue + THRU- PowerCON Grey
Fixing	Adjustable yoke
Fixture body	Powdercoated steel
Unit Dimensions (HxWxD)	6.1 x 13.4 x 5.3 in (15.5 x 34 x 13.5 cm)
Shipping Dimensions (HxWxD)	TBA
Unit Weight	10.5 lb (4.7 kg)
Shipping weight	12 lb (5.4 kg)

Specifications and features are subject to change without notice.

