

RDM - 6Wall

DMX-512A(RDM) Signal splitter

6 ways in wall mount



The 6 ports wall mount RDM splitter RDM-6R is designed for system distribution of DMX-512A(RDM) network. Use as easy as the normal DMX-512 splitter, plug and play with 3 pin signal connectors.


Features

- Competitable for both DMX-512A(RDM) and DMX-512(1990)
- Compact plastic wall mount housing design
- Signal In/Thru (3 pin connector) and 6 ports Signal buffered output (3 pin connector)
- Signal Line Out or Terminate push button
- CE / ETL/cETL and FCC marked

PHILIPS
Strand Lighting

SPECIFICATION SUBMITTAL

CONSULTANT: <input type="text"/>	PROJECT NAME: <input type="text"/>	MODEL NUMBER QUANTITY: <input type="text"/>
DATE: <input type="text"/>	PROJECT NUMBER: <input type="text"/>	APPROVED BY: <input type="text"/>

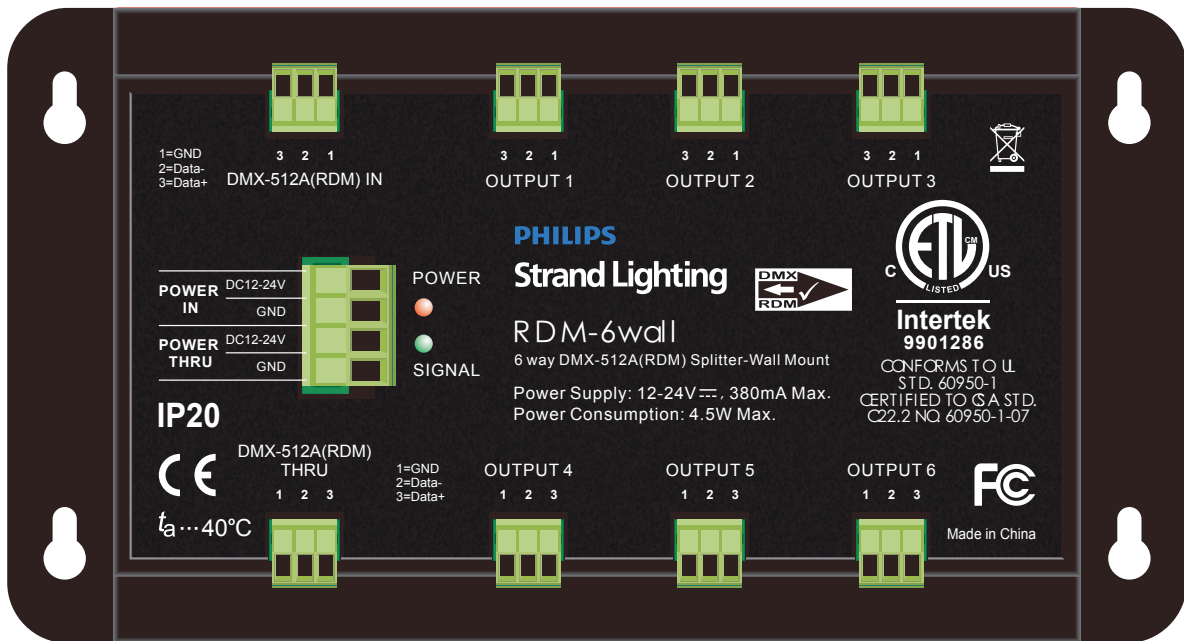

Technical Specifications

Supply Voltage: DC12-24V, 4.5W
(power adaptor include)

Standards Compliance: RDM-6Wall is CE and ETL/cETL
marked



Environmental Data

Temperature: 0 to 35°C
Humidity Range: 0 to 95% Non-condensing

Mechanical Data

Connections: DMX512 Input and Thru
6 ports of DMX-512A(RDM) output

Weight: 0.2 kg
Dimensions: 195 x 106 x 22mm

Ordering Information

Cat No. Description

DMX512A(RDM) Splitter

RDM6WALL DMX512A(RDM) 6 ports splitter, wall mount

Philips Entertainment U.S.
10911 Petal Street
Dallas, TX 75238
Tel: +1 214647 7880
Fax: +1 214647 8030

Philips Entertainment Lighting Asia Limited
Unit C, 14/F, Roxy Industry Centre
No. 41 - 49 Kwai Cheong Road
Kwai Chung, N.T. Hong Kong
Tel: +852 27969786
Fax: +852 27986546

Philips Entertainment Group Europe
Rondweg Zuid 85
Winterswijk 7102 JD Netherlands
Tel: +31 543-542343
Fax: +31 53 4500425

Philips Entertainment New Zealand
19 - 21 Kawana Street, Northcote
Auckland 0627, New Zealand
Tel: +64 9481 0100
Fax: +64 9481 0101